

Standard Equipment/Optional Equipment

Standard Equipment

Long tiller with low mounting point	Linde LAC controller
Fibre-glass reinforced tiller and tiller head (Grivory®)	CAN-bus architecture
Exxtral® motor and battery cover	Electromagnetic brake
Creep speed control (T20)	Automatic parking brake
Proportional speed control (T20)	Cushion rubber or polyurethane drive wheel
End-of-stroke resistance	Single polyurethane load wheels
Wide and deep storage compartments depending on battery size	Fork length: 1150 mm
Multi-function display with hourmeter including scheduled maintenance, fault code and battery discharge indicator	Width over forks: 560 mm
Key switch or LFM Go (PIN-code access)	Protection to -10°C
AC motor	Vertical 2 PzS battery change
	Horn
	Clipboard

Optional Equipment

Drive wheels: wet grip, non marking polyurethane, treaded polyurethane, treaded cushion	Basic Modules:
Load wheels: tandem polyurethane, single and tandem polyurethane greaseable	- LFM Access Control PIN
Vertical 3 PzS (T18, T20) battery change	Add-on Modules:
Lateral 2 PzS (T16, T18, T20) and 3 PzS (T18, T20) battery change	- LFM Usage Analysis
Mobile roller trolley (1 battery)	- LFM Impact sensor
Fixed roller trolley (2 batteries)	Creep speed control (T16, T18)
Alternative fork lengths and widths	Proportional speed control (T18)
Load backrest	Cold store protection to -35°C
	Automatic battery watering system
	Built-in charger
	High frequency charger

Other options available on request



Electric Pallet Trucks
Capacity 1600, 1800 and 2000 kg
T16, T18, T20

SERIES 1152



Safety

The lower chassis is rounded in shape and low to the ground protecting the operator’s feet whilst the hand guards of the tiller head effectively shield his hands. The long tiller mounted low down on the chassis ensures ample safety clearance between operator and truck as well as keeping steering effort low.

Performance

The combination of a new AC motor and Linde LAC digital control makes these pallet trucks highly efficient. Operating parameters can be adjusted to match any application. When additional performance is needed, a booster effect automatically provides higher torque.

Comfort

All controls on the ergonomic tiller can be easily operated by either hand. A Creep speed button offers utmost manoeuvrability in confined areas. Proportional speed feature automatically alters traction speed in relation to the distance between truck and operator. Finished in tactile materials, these trucks deliver effortless, smooth load handling to deliver greater productivity.

Features

Steering system

- Proportional speed control varies truck speed automatically in relation to tiller angle for safe, comfortable and productive operation
- A Creep speed button ensures high manoeuvrability in confined areas when operating at low speeds with the tiller in the upright position
- End-of-stroke resistance on the tiller avoids accidental, abrupt braking
- Soft tiller fold-back slows down the tiller when returning into upright position, avoiding tiller snapping on the motor cover

Chassis & Forks

- Compact, rounded shape
- Strong, robust steel construction
- Low chassis skirt to protect operator’s feet
- Sturdy fork tips: each can support a load of 2,000 kg without bending
- Large castor wheels with shock absorbers for stability on ramps and uneven floors



Working station & Display

- Wide, deep storage compartment for shrink wrap, pens, markers etc.
- Strong and durable Exxtral® motor and battery cover
- Multi-function display with hourmeter including scheduled maintenance, fault code and battery discharge indicator

Tiller & Tiller head

- The ergonomic Grivory® material ensures effortless operation
- Long tiller with low mounting point provides a large safety clearance between operator and chassis
- Wrap-around hand protection
- Comfortable controls, operable with either hand and gloves



Braking system


- Highly efficient electromagnetic brake applied by moving the tiller to fully up or down position
- Automatic braking on releasing traction butterfly or reversing direction
- Truck slows before coming to a stop, remaining under total control at all times

Batteries and Chargers

- Vertical battery change as standard
- Side battery change on rollers as option
- Battery capacities from 150 Ah to 375 Ah
- Built-in 35 A charger as option

Maintenance/CAN-bus architecture

- Zero maintenance, moisture and dust-proof AC motor
- CAN-bus architecture enables fast, easy access to all truck data
- Individually adjustable parameters via diagnostic plug
- Rapid and convenient access to main components via front service panel



Linde Material Handling GmbH, Postfach 100136, 63701 Aschaffenburg, Germany
Phone +49621.99-0, Fax +49.60 21.99-1570, www.linde-mh.com, info@linde-mh.com


Linde Material Handling



Subject to modification in the interest of progress. Illustrations and technical details could include options and not binding for actual constructions. All dimensions subject to usual tolerances.

Technical Data according to VDI 2198

Characteristics	1.1	Manufacturer		LINDE	LINDE	LINDE
	1.2	Model designation		T16	T18	T20
	1.2a	Series		1152	1152	1152
	1.3	Power unit		Battery	Battery	Battery
	1.4	Operation		Pedestrian	Pedestrian	Pedestrian
	1.5	Load capacity	Q (t)	1.6	1.8	2.0
	1.6	Load centre	c (mm)	600	600	600
	1.8	Axle centre to fork face	x (mm)	876 / 960 ¹⁾	876 / 960 ¹⁾	876 / 960 ¹⁾
	1.9	Wheelbase	y (mm)	1237 / 1303 ¹⁾	1312 / 1378 ¹⁾	1387 / 1453 ¹⁾
Weights	2.1	Service weight	(kg)	421	470	582
	2.2	Axle load with load, front/rear	(kg)	684 / 1337	719 / 1551	830 / 1752
	2.3	Axle load without load, front/rear	(kg)	327 / 94	340 / 130	432 / 150
Wheels/Tyres	3.1	Tyres rubber, SE, pneumatic, polyurethane		R+P/P ²⁾	R+P/P ²⁾	R+P/P ²⁾
	3.2	Tyre size, front		Ø 230 x 90	Ø 230 x 90	Ø 230 x 90
	3.3	Tyre size, rear		Ø 85x105 (Ø 85x100) ³⁾	Ø 85x105 (Ø 85x100) ³⁾	Ø 85x105 (Ø 85x100) ³⁾
	3.4	Auxiliary wheels (dimensions)		Ø 125 x 40	Ø 125 x 40	Ø 125 x 40
	3.5	Wheels, number front/rear (x = driven)		1x + 2 / 2 (1x + 2 / 4) ³⁾	1x + 2 / 2 (1x + 2 / 4) ³⁾	1x + 2 / 2 (1x + 2 / 4) ³⁾
	3.6	Track width, front	b10 (mm)	482	482	482
	3.7	Track width, rear	b11 (mm)	355 / 395 / 515	355 / 395 / 515	355 / 395 / 515
Dimensions	4.4	Lift	h3 (mm)	125	125	125
	4.9	Height of tiller arm in operating position, min/max	h14 (mm)	740 / 1208	740 / 1208	740 / 1208
	4.15	Height, lowered	h13 (mm)	85	85	85
	4.19	Overall length	l1 (mm)	1650	1725	1800
	4.20	Length to fork face	l2 (mm)	500	575	650
	4.21	Overall width	b1/b2 (mm)	720	720	720
	4.22	Fork dimensions	s/e/l (mm)	55 x 165 x 1150	55 x 165 x 1150	55 x 165 x 1150
	4.25	Fork spread, min/max	b5 (mm)	520 / 560 / 680	520 / 560 / 680	520 / 560 / 680
	4.32	Ground clearance, centre of wheelbase	m2 (mm)	36 / 161 ⁴⁾	36 / 161 ⁴⁾	36 / 161 ⁴⁾
	4.33	Aisle width with pallet 1000 x 1200 across forks	Ast (mm)	1759 ⁵⁾ ⁶⁾	1859 ⁵⁾ ⁶⁾	1911 ⁵⁾ ⁶⁾
	4.34	Aisle width with pallet 800 x 1200 along forks	Ast (mm)	1959 ⁵⁾ ⁶⁾	2059 ⁵⁾ ⁶⁾	2111 ⁵⁾ ⁶⁾
Performance	4.35	Turning radius	Wa (mm)	1435 / 1515 ¹⁾ ⁵⁾	1535 / 1605 ¹⁾ ⁵⁾	1587 / 1669 ¹⁾ ⁵⁾
	5.1	Travel speed, with/without load	(km/h)	6 / 6	6 / 6	6 / 6
	5.2	Lifting speed, with/without load	(m/s)	0.037 / 0.046	0.036 / 0.046	0.039 / 0.053
	5.3	Lowering speed, with/without load	(m/s)	0.059 / 0.05	0.059 / 0.05	0.057 / 0.048
	5.8	Maximum climbing ability, with/without load	(%)	13.0 / 24.0	12.0 / 24.0	10.0 / 24.0
	5.9	Acceleration time, with/without load	(s)	7.6 / 6.5	7.7 / 6.5	8.0 / 6.5
	5.10	Service brake		Electro-magnetic	Electro-magnetic	Electro-magnetic
Drive	6.1	Drive motor, 60 minute rating	(kW)	1.2	1.2	1.2
	6.2	Lift motor, rating at S3 15%	(kW)	1	1	1.2
	6.3	Battery according to DIN 43531/35/36 A,B,C,no		2PzS-B	43 535/ 2PzS	43 535/ 3PzS
	6.4	Battery voltage/rated capacity (5h)	(V/Ah)	24 / 150	24 / 250	24 / 375
	6.5	Battery weight (± 5%)	(kg)	157	212	320
	6.6	Power consumption according to VDI cycle	(kWh/h)	0,38	0,38	0,38
Others	8.1	Type of drive control		LAC	LAC	LAC
	8.4	Noise level at operator's ear	(dB(A))	< 70	< 70	< 70
1) Forks upraised / lowered 2) Solid rubber + polyurethane / polyurethane 3) Figures in parenthesis with tandem load wheels.				4) min./max. 5) With creep speed = tiller in vertical position 6) Including a 200 mm (min.) operating aisle clearance.		

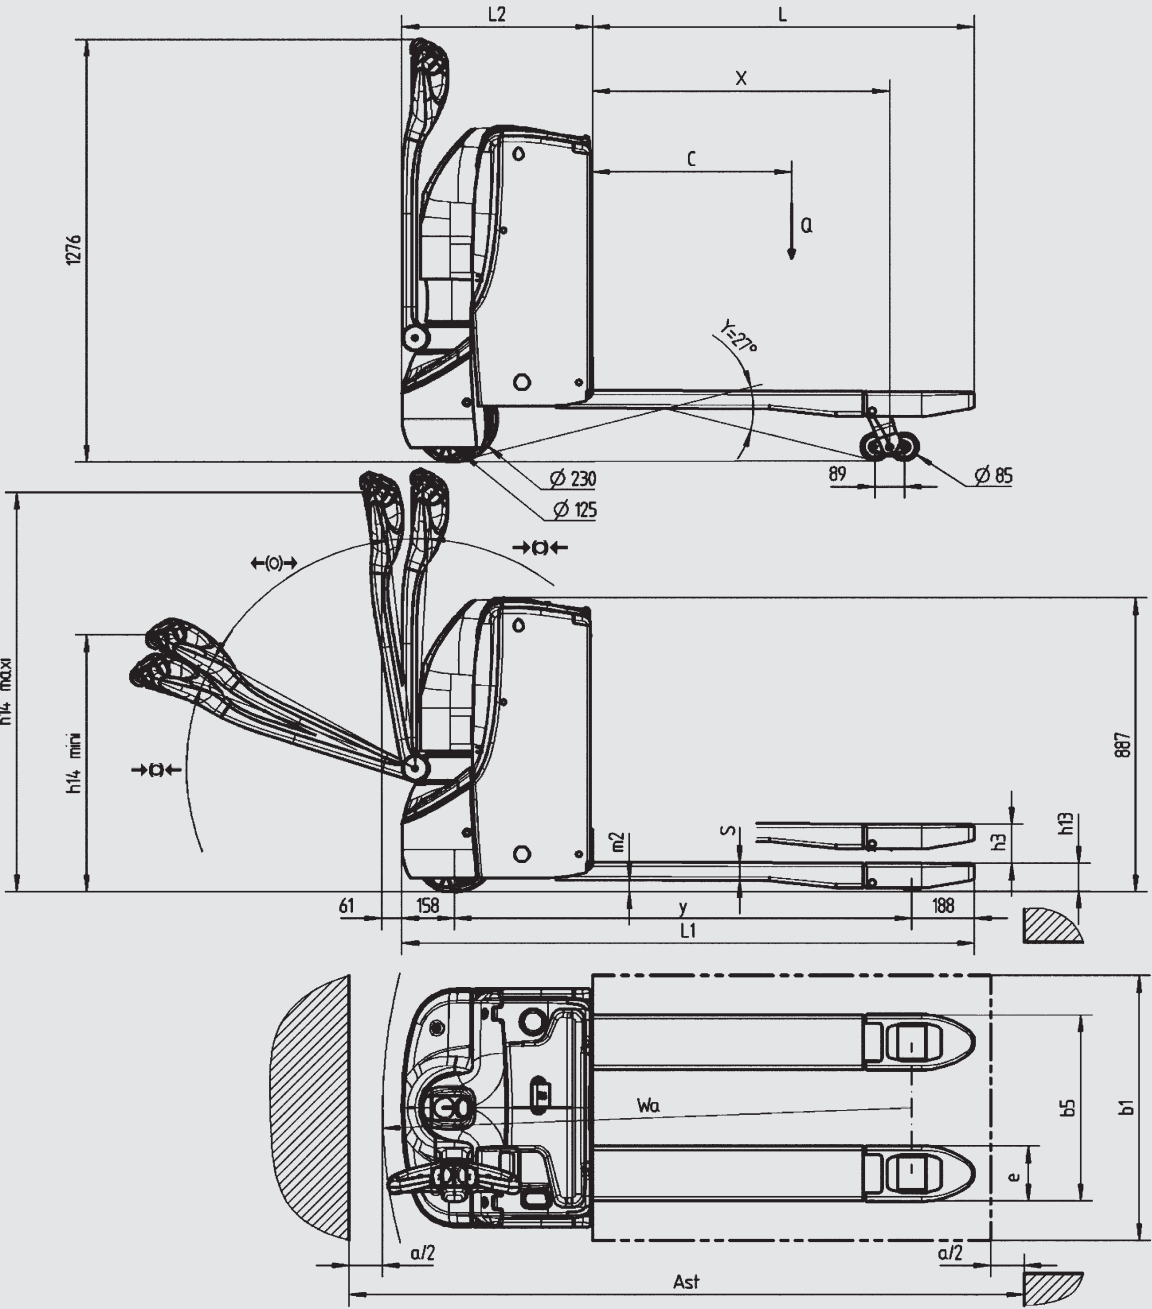

Battery Type	Battery Capacity (Ah)	Dimension l2 (mm)	Dimension l1 (mm)	Fork length l (mm)	Turning radius Wa (mm)	Aisle width Pallet 800 x 1200 lengthwise	Aisle width Pallet 1000 x 1200 cross-wise
2 PzS-B	150	500	1650	1150	1415	1939	1889
2 PzS	250	575	1725	1150	1515	2025	1975
3 PzS*	270 - 375	650	1800	1150	1567	-	1860

* not available on T16 model

