


## Pedestrian wrap over forks stacker

*Pedestrian wrap over fork stacker. Full-free-view mast lifting from 1.650 mm up to 4.650 mm. Separate excitation traction motor allowing maximum modularity in movements. It is available with load lifting and lowering commands with proportional push-buttons on the driving tiller. It is characterized by its handiness and compact dimensions, suitable for all commodity uses.*



**OMG S.p.A.**  
via dell'Artigianato, 12  
46023 - GONZAGA (MN) Italy  
Tel. + 39 0376 52.60.11  
Fax. + 39 0376 58.80.08  
[www.omgindustry.com](http://www.omgindustry.com)  
[info@omgindustry.com](mailto:info@omgindustry.com)

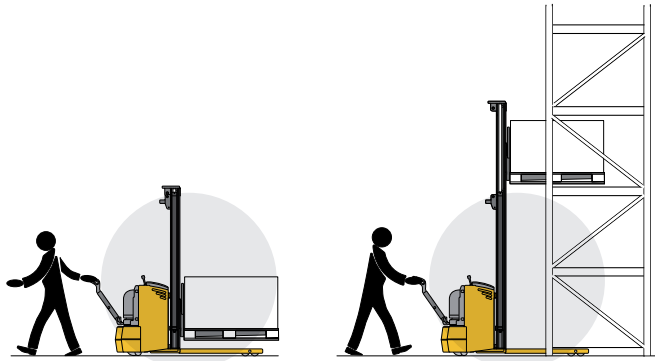

Azienda Certificata  
ISO 9001:2008 N°7236 MN  
ISO 9001:2008 N°23355


• 715 K

Characteristics	1.1	Manufacturer		OMG S.p.A.
	1.2	Manufacturer's model designation		715 K
	1.3	Drive : E ( electric )		E
	1.4	Type of control : T (tiller) S (steering wheel) A (pedestrian) P (standing) R (seated)		T / A
	1.5	Load capacity	Q ( t )	1.5
	1.6	Load centre distance	c ( mm )	600
	1.8	Load distance, centre of drive axle to fork	X ( mm )	660
	1.9	Wheelbase	Y ( mm )	1.330
Weights	2.1	Service weight ( battery included )	Kg	1.240
	2.2	Axle loading ( with load )	front / rear	Kg 1.000 / 1.740
	2.3	Axle loading ( without load )	front / rear	Kg 848 / 392
Wheels - Chassis	3.1	Tyres : plt ( polyurethane ) vlk ( vulkollan )		plt
	3.2	Front wheels size	mm	245
	3.3	Rear wheels size	mm	85
	3.4	Stabilizers wheels dimensions	mm	150
	3.5	Wheels : number front / rear ( x = traction )		1x + 1 / 2 - 4
	3.6	Front track width	b 10	600
	3.7	Rear track width	b 11	380
Dimensions	4.2	Lowered mast height	h1 ( mm )	2.120
	4.3	Free lift	h5 ( mm )	1.525
	4.4	Lifting height	h3 ( mm )	3.010
	4.5	Extended mast height	h4 ( mm )	3.730
	4.9	Height of tiller arm in drive position ( min / max )	h14 ( mm )	840 / 1.230
	4.15	Forks lowered height	h13 ( mm )	90
	4.19	Total length	l1 ( mm )	2.050
	4.20	Length to forks face	l2 ( mm )	900
	4.21	Overall width	b1 / b2 ( mm )	880
	4.22	Forks dimensions	s / e / l	70 / 180 / 1.150
	4.24	Fork carriage width	b3 ( mm )	665
	4.25	Width over forks	b5 ( mm )	560
	4.32	Ground clearance	m2 ( mm )	20
	4.33	Aisle width for pallets 1000 x 1200 forking side 1200	Ast3 ( mm )	
	4.34	Aisle width for pallets 800 x 1200 forking side 800	Ast3 ( mm )	2.470
	4.35	Turning radius	Wa ( mm )	1.580
Performances	5.1	Travel speed	laden / unladen	Km / h 5.8 / 6
	5.2	Lifting speed	laden / unladen	m / s 0.12 / 0.2
	5.3	Lowering speed	laden / unladen	m / s 0.45 / 0.4
	5.7	Gradient performance ( S2 30 min )	%	
	5.8	Max gradient performance ( S2 5 min )	%	6 / 10
	5.10	Service brake M ( mechanical ) I ( hydraulic ) IV ( inversion braking )		IV
El.Motor	6.1	Traction motor, rating S2 60 min	KW	2
	6.2	Lifting motor, rating S3 15%	KW	3
	6.3	Battery according DIN 43531 / 35 / 36 A, B, C, no		no
	6.4	Battery voltage, nominal capacity K5	V / Ah	24 / 300
	6.5	Battery weight ( ± 5 % )	Kg	200
Others	8.1	Type of travel control		MOS DC
	8.4	Sound level at driver's ear	dB ( A )	< 70

Technical specification according to VDI 2198

Information and data are given for information only, OMG S.p.A. will have the sole right for technical changes and improvements without giving any notice.

full free lift for duplex mast	o	automatic battery refilling	o
full free lift for triplex mast	o	electronic braking system	s
push button for vertical operation	o	electronic speed control	s
lifting/lowering by push buttons on tiller arm	o	electromagnetic parking brake	s
cold store execution	o	BDI/hour meter with lifting cut-off at 80% discharge	s
s=standard		o=option	

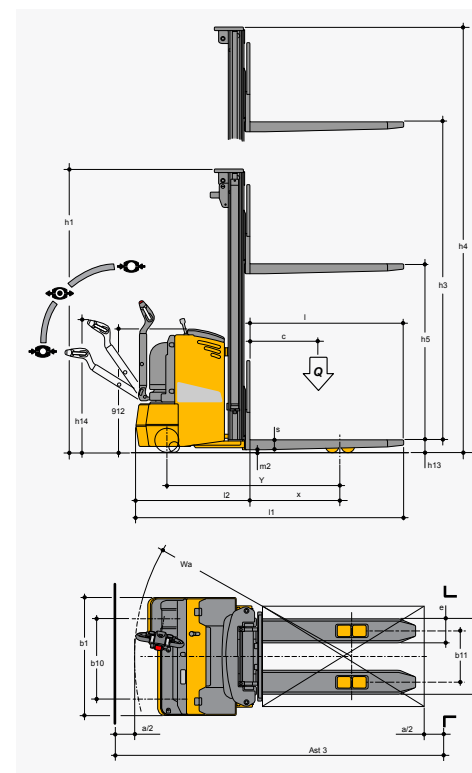

h3		h1	h4	h5	(Q) t
1.560 sx	mm	2.085	2.250	1.565	1.5
2.710 dx	mm	1.970	3.435	1.375	1.5
3.010 dx	mm	2.120	3.730	1.525	1.35
3.510 dx	mm	2.370	4.230	1.775	1.15
3.810 tx	mm	1.870	4.500	1.275	1.0
4.110 tx	mm	1.970	4.800	1.375	0.9
4.560 tx	mm	2.120	5.250	1.525	0.75